


ALLOY



Ended Shear Beam-Double

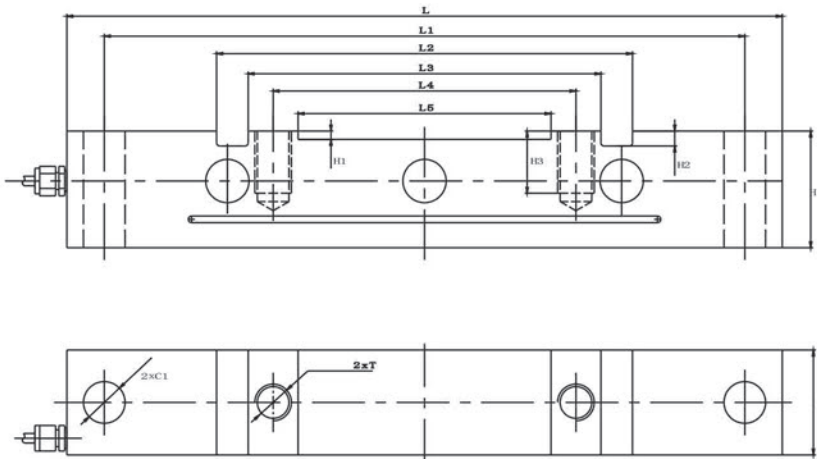


RATED CAPACITY

ton/mm	L	L1	L2	L3	L4	L5	H	H1	H2	H3	W	C1	T
12.5,15,20,30	430	385	250	212	182	152	70	5	9	40	63	Φ25	M22

SPECIFICATIONS

Full scale Output:	2.0mV/V ± 0.002mV/V
Zero Balance:	± 1% F.S
Non-linearity:	< ± 0.3% F.S
Repeatability:	< ± 0.03% F.S
Hysteresis Error:	< ± 0.03% F.S
Creep (30 min):	< ± 0.02%F.S
Input Resistance:	750Ω ± 10Ω
Output Resistance:	700Ω ± 5Ω
Recommended Excitation:	10V (15V Maximum)
Insulation Resistance:	> 5000MΩ (50V DC)
Temperature Effect on Sensitivity:	< ±0.05% F.S/10°C
Temperature Effect on Zero Balance:	< ± 0.05% F.S/10°C
Compensated Temperature Range:	-10°C to 40°C
Operating Temperature Range:	-10°C to 40°C
Storage Temperature Range:	-30°C to 70°C
Safe Overload:	150% of full scale
Ultimate Overload:	250% of full scale
IP class:	Ip68
Material:	Alloy Steel
Warranty:	One-year limited warranty

Wiring Schematic Diagram

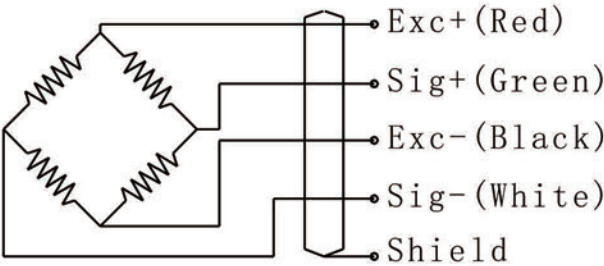

INTERCHANGEABLE PRODUCTS

Manufacturer	Model