


ALLOY STEEL



Single-Ended Shear Beam

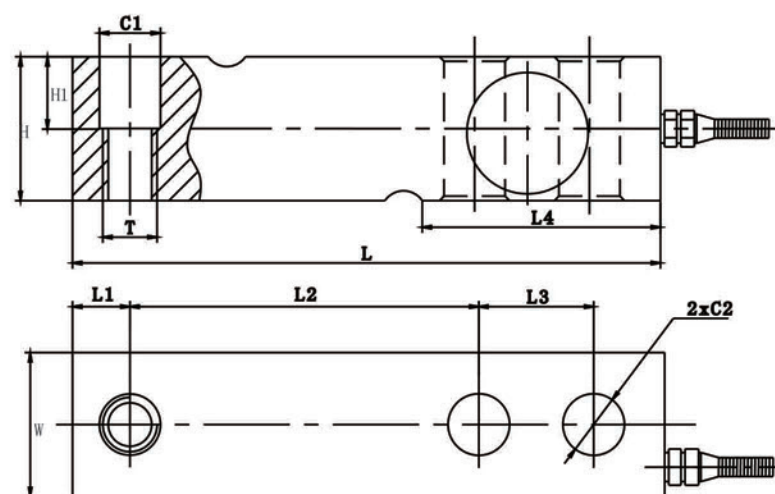


RATED CAPACITY

ton/mm	L	L1	L2	L3	L4	H	H1	W	C1	C2	T	
0.5, 1, 1.5, 2	130	12.6	76.2	25.4	50.5	32	16	32	∅ 13.5	∅ 13	M12	
3, 5	171.5	19	95.3	38.1	70	48	24	36.5	∅ 20.5	∅ 20.5	M18x1.5	

SPECIFICATIONS

Full scale Output:	2.0 ± 0.003mV/V
Zero Balance:	± 1% F.S
Accuracy class:	C3 OIML approval
Repeatability:	< ± 0.03% F.S
Hysteresis Error:	< ± 0.03% F.S
Creep (30 min):	< ± 0.02% F.S
Input Resistance:	400 ± 20Ω
Output Resistance:	352 ± 3Ω
Recommended Excitation:	10V (15V Maximum)
Insulation Resistance:	> 5000MΩ (50V DC)
Temperature Effect on Sensitivity:	< ± 0.05% F.S/10°C
Temperature Effect on Zero Balance:	< ± 0.05% F.S/10°C
Compensated Temperature Range:	-10°C to 40°C
Operating Temperature Range:	-10°C to 40°C
Storage Temperature Range:	-30°C to 70°C
Safe Overload:	150% of full scale
Ultimate Overload:	250% of full scale
IP class:	Ip68
Material:	Alloy Steel
Warranty:	One-year limited warranty

Wiring Schematic Diagram

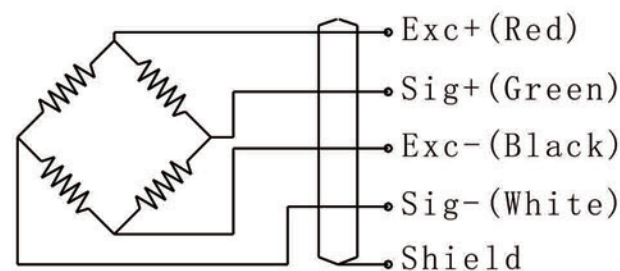

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Vishay Tedea-Huntleigh	3510
Keli Sensing	SQBB

*OIML C3 is available for 1t to 5t, the accuracy beyond 1t-5t is 0.03% F.S.

www.acecellschina.com

Dimensions and specifications subject to change without notice